

New type of hollow plastic concrete formworks


Product introduction

Scientific formula

Advanced craft

Environmental products

New type of concrete plastic formworks

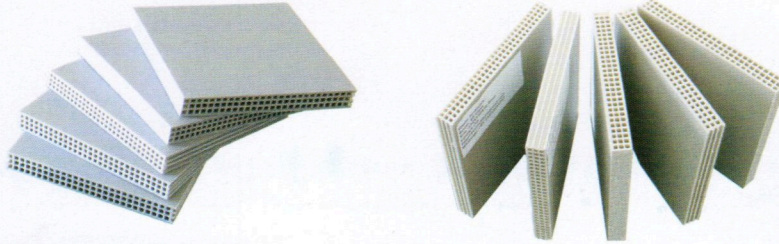

Specification And Type

Thickness, mm	Specification, mm	Average weight, kg
16.5mm	915mm × 1830mm	13.5kg
16.5mm	1220mm × 2440mm	24kg
18mm	915mm × 1830mm	14.1kg
18mm	1220mm × 2440mm	25kg

General Operation And Note Of Instrument For Concrete Formworks

1. Method of use as well as wooden formwork, hollow plastic formwork reinforcement direction with batten direction placed in cross shaped.
2. No need to smear the mold release agent before using formwork.
3. When cast-in-place the flat plate, spacing between the keels should be 20 ~ 25 cm, and the spacing between the wall plate and keel should be 10 ~ 20 cm.
4. The seam-line between templates should be taped.
5. The length of nail should not be too long, generally about 30 ~ 35 mm.
6. The strength to drive nails should be moderate.
7. When removing the formwork, should start from the small part of one end, the support and the plates should be removed at the same time aiming at preventing the formwork widespread drops, don't let the corner drop on the ground vertically.
8. The formwork accesses to be mixed used with wood formwork, bamboo formwork and other material formwork.