




W2 FLEXI GUARD

ELASTIC WATERPROOFING CEMENT ADMIX. A WATER-BASED POLYMER DESIGNED TO MODIFY CEMENT

- Ensure surface to be treated is clean and intact, Free of fine dust and oil.
- Hard brush applies **W2 + Cement + Sand Slurry** in **2 coats** after the previous coat has dry.
- **Final dry thickness is 1.5 to 2 mm.**
- During application, the slurry should be mix well without seeing the polymer floating above.
- It can be applied over damped surface.

Waterproofing Membrane:

- Mix & stir to ensure uniform distribution.
- Increasing amount of cement during mixture will increase hardness.
- With higher content of **W2** the elongation rate at break, cohesion and water resistance will increase.

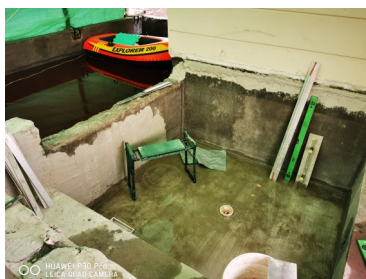

***Soaking for 1 month with Red Food Coloring, without Leak and peeling. (at No. 1, Jalan Yasin)**

TECHNICAL DATA

Solid content	56 ± 1 %
PH value	7.5 - 8.5
Viscosity	500 – 1300 mPa.s (3# / 60rpm/ 25°C)
Elongation rate at break	2400 (% >/=)
Greatest Pull Strength	0.6 N / mm ²
Water absorption rate	1.0 % over 24 hours
Working Temperature Range	-20 ⁰ C to 100 ⁰ C

PSB Test: Jan 31, 2002 DIN 1048 Part 5: 1991 Zero water penetration on concrete

PACKING 5 kg-carboy, 20 kg-jerry can

Disclaimer: *The information provided in this brochure is ensured to be as accurate as possible at the time of inclusion, however there may be inadvertent and occasional errors which may have slipped from our notice. Warrior Pte Ltd does not guarantee and make no representations or warranties of any kind about the information, advice and opinions provided and reserves the right to make changes and corrections at any time, without prior notice to any parties. Warrior Pte. Ltd. accepts no liability for any inaccuracies or omissions in its brochure and any decisions made based on information and opinions contained in the brochure is the sole responsibility of the .*

WARRIOR PTE LTD

Blk 17 Marsiling Industrial Estate Road 1 # 01-11 Singapore 739279

Tel: (65) 6364 5100

Fax: (65) 6364 0629

war99@singnet.com.sg

www.warrior.com.sg

bizSAFE₃