WARRIOR PTE LTD

Blk 17, Marsiling Industrial Estate Road 1 # 01-11
Singapore 739279
Tel: (65) 6364 5100 / 6364 5060 / 6367 3676
Fax: (65) 6364 0629

GST & Co. Reg. No. 20-0401392-H
CR No. 7139 204 00 00 M

war99@singnet.com.sg
http://www.warrior.com.sg

JOB REFERENCES

W4 WATER REPELLENT

Hillview Mansion 10 storeys Condo

Job Completion Date - April 1996
Job -**New Concrete Flat Roof**

W4 WATER REPELLENT was used for the protection of the whole External wall of the building of about 40,000 sq. feet.

Vally Point Condominium, At River Vally Road

Date of Completion: APRIL 2005

Water Repelling & Impregnation Treatment:

1. **D**ilute **W4 WATER REPELLENT + Water = 1 : 50.**
2. Roll it onto the Top and 4 sides of the Granite tiles, before installation.

PASIR PANJANG SHOPS

Date Oct 1996

Rising Damp

Water rises above 10 feet high, along the brick wall**.**

Remedies:
Drilling at the base of the wall, inject W4 WATER REPELLENT IMPREGNATOR, and W1 CEMENT STRENGTHENER polymer, to seal the pore and gap.

HILLVIEW MANSION
Date of Completion: APRIL 1996

<u>Site of Waterproofing:</u>

Sprayed on the external wall to prevent seepages from damaging the interior PVC wallpaper.

MALAYAN RAILWAY

Date of Completion: DEC 2000

<u>Site of Waterproofing:</u>

Concrete Arch Roof

Sprayed with W4.

New York Hotel – Johore

Dec 21, 2005

Area: 30,000 sq. feet

New roof was flood coated with W4 only.
Contractor: BINA INTERGRATED TECHNOLOGY SDN BHD

Waterside Condominium

Date of Completion: APRIL 2006

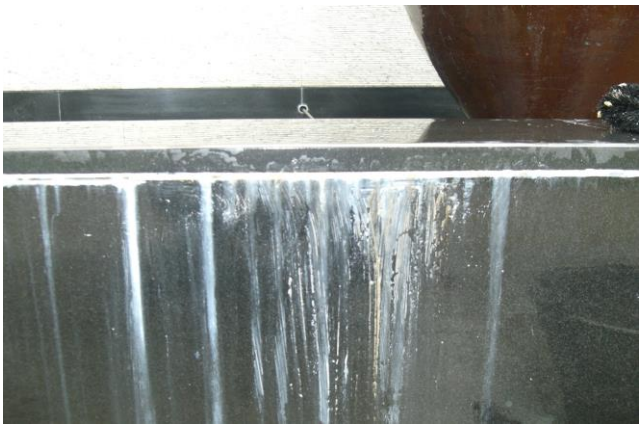

Before treatment

After Spraying with W4 WATER REPELLENT

1. The Water feature was having serious efflorescence.
2. Efflorescence was removed with **ER10 EFFLORESCENE CLEANER**, before spraying it with Diluted W4 WATER REPELLENT

THE IMPERIAL CONDO
Date of Completion: JUNE 2007

	W4 Water Repellent sprayed on external wall and wall-floor joint to stop water seepage. **W4 injected into wall near the leakage points to block the pores and cracks in concrete.**

SembCorp Utilities (SCU) VHP Boiler BOP Steam and BFW Piping Project
Jurong Island
Date of Completion: August 2007

	RC roof chipped and holes drilled for anchoring of steel frame above roof. **W4 Water Repellent applied onto the chipped area, and into the drilled holes, to prevent water from penetrating and leaking into machine rooms below.**

Crystal Rhu

Job Completion Date – August 1998
W4 Spray on the wall.

10 years later, the paint remain intact and clean.

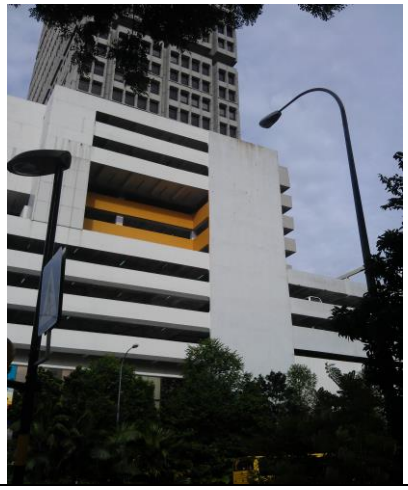

Shaw Tower

Date of Completion: May 1994

W4 was sprayed on the external wall from the 7th storey car park, to stop water absorption into the mosaic wall.

SembCorp Utilities (SCU) VHP Boiler BOP Steam and BFW Piping Project
Jurong Island
Date of Completion: August 2007

RC roof chipped and holes drilled for anchoring of steel frame above roof.

W4 Water Repellent applied onto the chipped area, and into the drilled holes, to prevent water from penetrating and leaking into machine rooms below.
Followed by W808 ELASTO COAT

LTA Overhead Bridge at Marymount Road

August 2008

Waterproofing of the Flower Bed.

Product used:
DPC Damp Proof Coating
W4 Water Repellent.
W808 Elasto Gum.
Done by: WARRIOR PTE LTD

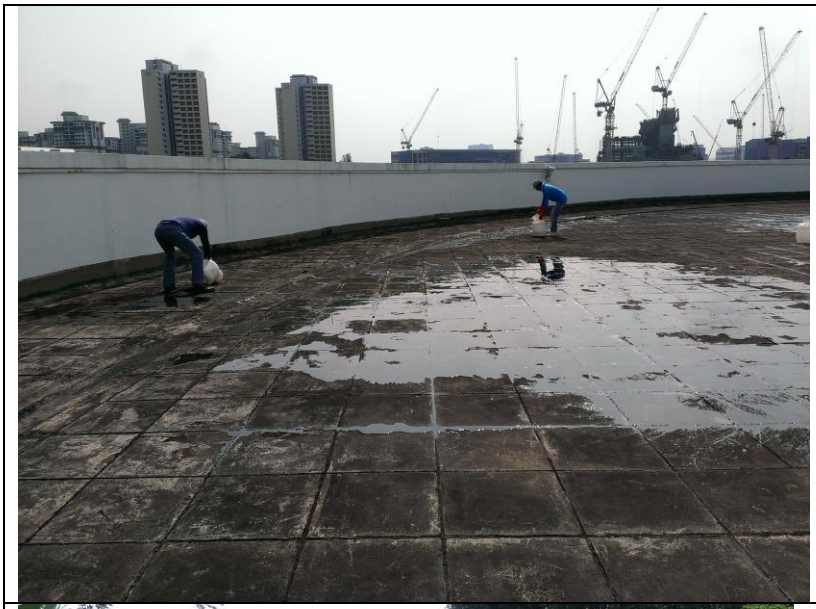

CPF JURONG EAST

Jan 3, 2009

Defect: water is dripping through the lighting point in the office below.

W4 was poured over the affected area.
Leak has since stopped.
Done by: WARRIOR PTE LTD

Ngee Ann Alumni

Job Completion Date – January 2012

W4 sprayed onto the granite wall to prevent salt formation.

	Hewlett Packard- Alexandra **June 27, 2014** **Defect: Leaking Flat Roof.** **W7, W4 was flooded over the roof to crystalized and stop the leak.**
	Hewlett Packard- Alexandra **June 27, 2014** **Area: 35000 Sq. feet** **Contractor: BFMS Pte Ltd**
	Motorola **Aug 18, 2014** **Area: 13000 Sq. feet** **Contractor: BFMS Pte Ltd**
	Motorola **Aug 18, 2014** **Defect: Leaking Flat Roof.** **W7, W4 was flooded over the roof to crystalized and stop the leak.**

	UE RESIDENT **Nov 22, 2014** **Water Feature Leaking sideway.** **W7, W4 was flooded over to crystalized and stop the leak.** **Area: 3000 sq. feet** **Contractor: BFMS Pte Ltd**
	July 31, 2016 **VIVO CITY OPEN DECK** **W7, W4, DPC was flooded over to crystalized and stop the leak.** **Area: 16,000 sq. feet** **Contractor: SHINHWA CONSTRUCTION Pte Ltd** **Owner: Capital Land Ltd.**
	VIVO CITY OPEN DECK **Flooding test for 72 hours**

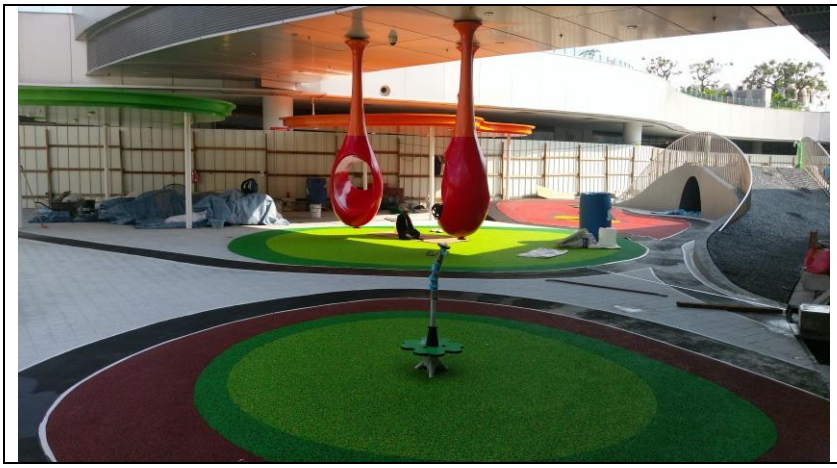	**VIVO CITY OPEN DECK** **Job Done**